


SLATWALL 3" O.C. STRENGTH CHART

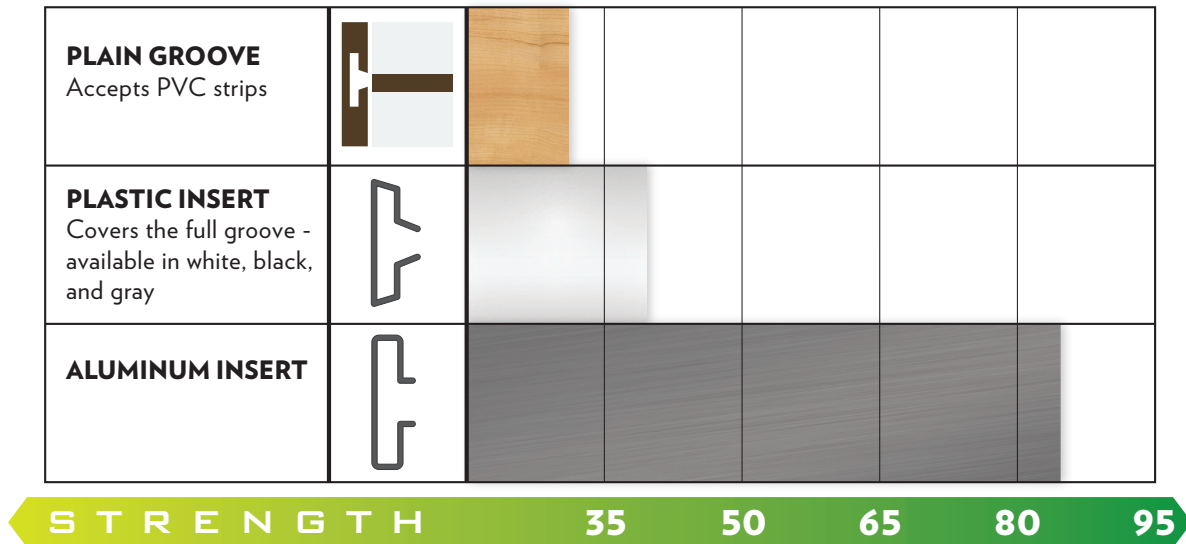

3/4" PANELS
3" ON CENTER
FAILURE POINT REACHED USING A 12" LOAD CELL DEVICE

This chart illustrates break out points and does not reflect recommended load capacities of any substrates, or insert options.

Actual load capacities will be less, may vary, and will depend on:

- Type of slatwall accessory used and the weight of the accessories for the application
- Distance the accessory extends from the face of the panel
- Number of accessories used to support the merchandise, or application
- Distribution of weight on the accessory, or system used
- Distance the accessory is from the edge / end of panel
- Proper installation - use of fasteners, or adhesives on the backs of the panels
- Length of the groove, or insert
- Other environmental factors

Please Note: Actual strength holding capacities will vary dependent upon; environmental issues, installation methods, fasteners used, accessories and application employed.